


Metalworking Machine

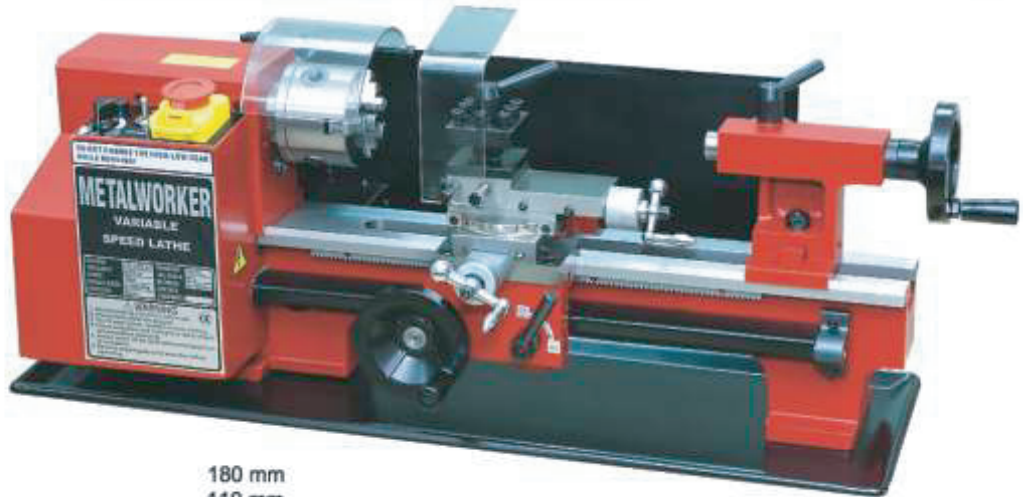

MINI LATHE Model 200/300

Specifications

Swing over bed		180 mm
Swing over saddle		110 mm
Distance between centers	Model 200	200 mm
	Model 300	300 mm
Hole through spindle		20 mm
Cross slide travel		65 mm
Spindle taper		MT3
Tailstock taper		MT2
Spindle speed	Low range	100-1100 rpm ±10%
	High range	100-2500 rpm ±10%
Motor output power		250 W
Range of threads	Metric version	0.4-2.0 mm (10 thread pitches)
	Imperial version	12-52 TPI (8 thread pitches)
Overall dimension (LxWxH)	Model 200	820x300x290 mm
	Model 300	720x300x290 mm
Weight(Net/Gross)	Model 200	33/36 kg
	Model 300	37/40 kg
Packing size (LxWxH)	Model 200	670x330x330 mm
	Model 300	770x330x330 mm

Features

- Safety Switch
- Variable speed
- Four position turret post
- Complete set of changing gear
- High accurate

Standard attachment

- 80mm 3-jaw Chuck
- MT2 Center
- Change gear set
- Wrench set
- Oil can



C2A is C2 with DRCD

OPTIONAL ACCESSORIES

Grinding attachment



S/N:10131



C2 or C3 owner, replace to DRCD by yourself.

Digital readout for cutting depth kit (DRCD kit)



S/N:10140

3-jaw chuck



S/N:10100 ø100mm
S/N:10100A ø100mm with flange

4-jaw chuck (independent)



S/N:10029 ø100mm
S/N:10029A ø100mm with flange

4-jaw chuck (independent)



ø80mm
S/N:10010

Rolling center



MT#2
S/N:10014

Spindle center



MT#3
S/N:10013

Lathe dog



S/N:10015

Face plate



ø160mm
S/N:10007

Clamping kit for face plate



S/N:10007A

Steady rest



S/N:10008

Follow rest



S/N:10009

Mill attachment



S/N: 10061

