

SMALL MILL


Specifications

Drilling capacity	25 mm
Max. tapping capacity	12 mm
End mill capacity	16 mm
Face mill capacity	50 mm
Spindle stroke	70 mm
Throat	230 mm
Max distance spindle to table	380 mm
Spindle taper	MT3 or R8
Spindle speed	100-1750 rpm±10%
Table effective size	550x160 mm
T-slot size	12 mm
Table cross travel	145 mm
Table longitudinal travel	400 mm
Motor output power	1000 W
Overall dimension (LxWxH)	760x720x930 mm
Weight (Net/Gross)	165/198 kg
Packing size (LxWxH)	840x820x1040 mm

- Variable spindle speed
- Feeding depth and spindle speed digital readout
- Touching switch
- Tapping function
- Brush-less DC motor
- Fine feeding function
- Horizontal milling
- Rotatory spindle box

Standard attachment

- Ø16 mm Drill chuck
- Wrench set
- Oil can

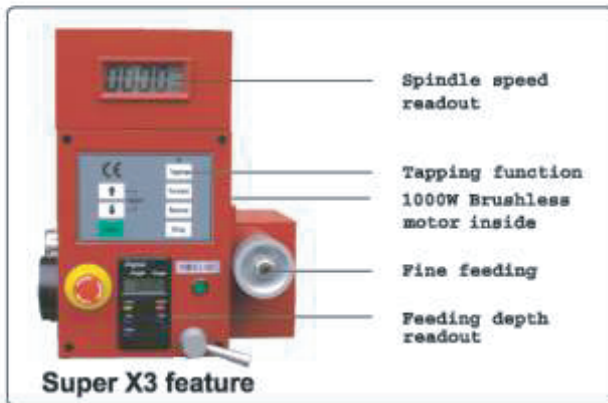

Spindle speed readout

Tapping function
1000W Brushless motor inside

Fine feeding


Feeding depth readout

Super X3 feature



Stand
S/N: 10114A

- S/N:10045 2 flute HSS end mill ø4-16mm 7pcs.set
- S/N:10126 Collet set
- S/N:10127 Stub milling machine arbor MT#3, ø16mm
- S/N:10128 Boring arbor with boring cutter MT#3
- S/N:10129 Stub milling machine arbor MT#3, ø16mm
- S/N:10113 Flying Cutter MT#3, ø50mm

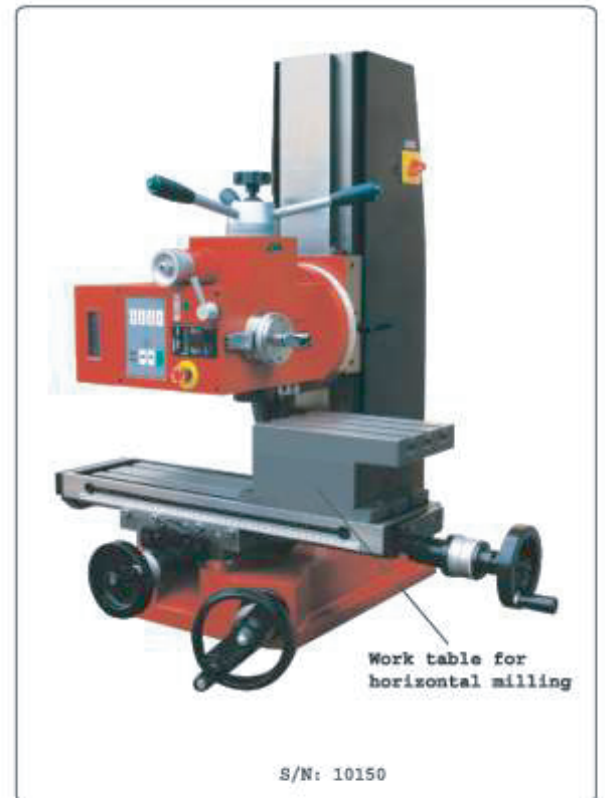

Work table for horizontal milling

S/N: 10150